


ALLOY CHAIN SLINGS

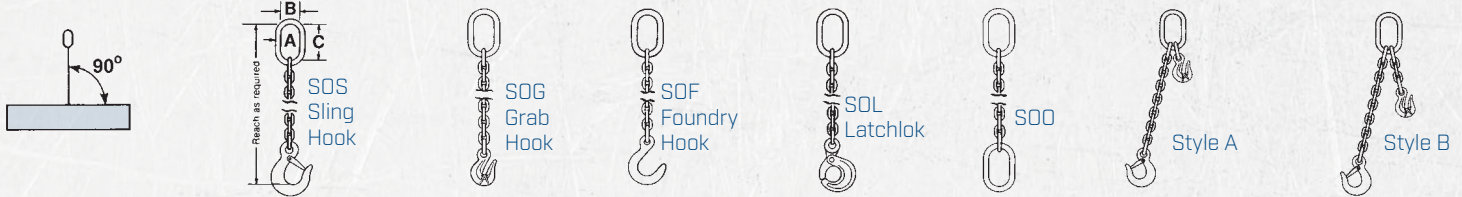

SINGLE GRADE 80 CHAIN SLING TYPE S & C

CHAIN SIZE		WLL (LBS)	OBLONG MASTER LINK DIMENSIONS (IN)			APPROX WEIGHT (LBS) TYP SOS SFT. REACH
(IN)	(MM)		DIA. MATERIAL A	INSIDE WIDTH B	INSIDE LENGTH C	
7/32	5.5	2,100	13/32	1-1/2	3	4
9/32	7	3,500	1/2	2-1/2	5	6
3/8	10	7,100	3/4	2-3/4	5-1/2	12
1/2	13	12,000	1	3-1/2	7	20
5/8	16	18,100	1	3-1/2	7	29
3/4	20	28,300	1-1/4	4-3/8	8-3/4	46
7/8	22	34,200	1-1/2	5-1/4	10-1/2	65
1	26	47,700	1-3/4	6	12	87
1-1/4	32	72,300	2	7	14	133

SINGLE GRADE 100 CHAIN SLING TYPE S & C

CHAIN SIZE		WLL (LBS)	OBLONG MASTER LINK DIMENSIONS (IN)			APPROX WEIGHT (LBS) TYP SOS SFT. REACH
(IN)	(MM)		DIA. MATERIAL A	INSIDE WIDTH B	INSIDE LENGTH C	
7/32	5.5	2,700	13/32	1-1/2	3	4
9/32	7	4,300	1/2	2-1/2	5	8
3/8	10	8,800	3/4	2-3/4	5-1/2	14
1/2	13	15,000	1	3-1/2	7	25
5/8	16	22,600	1	3-1/2	7	35
3/4	20	35,300	1-1/4	4-3/8	8-3/4	52
1	26	59,700	1-3/4	6	12	115




DOUBLE GRADE 80 CHAIN SLING TYPE D

CHAIN SIZE		WLL (LBS)*			OBLONG MASTER LINK DIMENSIONS (IN)			APPROX WEIGHT (LBS) TYP DOS SFT. REACH
(IN)	(MM)	60°	45°	30°	DIA. MATERIAL A	INSIDE WIDTH B	INSIDE LENGTH C	
7/32	5.5	3,600	3,000	2,100	13/32	1-1/2	3	7
9/32	7	6,100	4,900	3,500	1/2	2-1/2	5	10
3/8	10	12,300	10,000	7,100	3/4	2-3/4	5-1/2	22
1/2	13	20,800	17,000	12,000	1	3-1/2	7	36
5/8	16	31,300	25,600	18,100	1-1/4	4-3/8	8-3/4	56
3/4	20	49,000	40,000	28,300	1-1/2	5-1/4	10-1/2	88
7/8	22	59,200	48,400	34,200	1-3/4	6	12	121
1	26	82,600	67,400	47,700	2	7	14	159
1-1/4	32	125,200	102,000	72,300	2-1/4	8	16	240

DOUBLE GRADE 100 CHAIN SLING TYPE D

CHAIN SIZE		WLL (LBS)*			OBLONG MASTER LINK DIMENSIONS (IN)			APPROX WEIGHT (LBS) TYP DOS SFT. REACH
(IN)	(MM)	60°	45°	30°	DIA. MATERIAL A	INSIDE WIDTH B	INSIDE LENGTH C	
7/32	5.5	4,700	3,800	2,700	13/32	1-1/2	3	8
9/32	7	7,400	6,100	4,300	1/2	2-1/2	5	13
3/8	10	15,200	12,400	8,800	3/4	2-3/4	5-1/2	23
1/2	13	26,000	21,200	15,000	1	3-1/2	7	43
5/8	16	39,100	32,000	22,600	1-1/4	4-3/8	8-3/4	63
3/4	20	61,100	49,900	35,300	1-1/2	5-1/4	10-1/2	101
1	26	103,200	84,200	59,600	1-3/4	6	12	152



TRIPLE & QUAD GRADE 80 CHAIN SLING TYPE T & Q

CHAIN SIZE		WLL (LBS)*			OBLONG MASTER LINK SUB-ASSEMBLY DIMENSIONS (IN)			APPROX. WEIGHT (LBS)	
(IN)	(MM)	60°	45°	30°	DIA. MATERIAL A	INSIDE WIDTH B	INSIDE LENGTH C	TYPE TOS 5' REACH	TYPE QOS 5' REACH
7/32	5.5	5,450	4,450	3,150	1/2	2-1/2	5	10	13
9/32	7	9,100	7,400	5,200	3/4	2-3/4	5	16	21
3/8	10	18,400	15,100	10,600	1	3-1/2	7	34	43
1/2	13	31,200	25,500	18,000	1-1/4	4-3/8	8-3/4	58	73
5/8	16	47,000	38,400	27,100	1-1/2	5-1/4	10-1/2	89	110
3/4	20	73,500	60,000	42,400	1-3/4	6	12	127	157
7/8	22	88,900	72,500	51,300	2	7	14	190	235
1	26	123,900	101,200	71,500	2-1/4	8	16	248	302
1-1/4	32	167,800	153,400	109,400	2-3/4	9	16	384	468

TRIPLE & QUAD GRADE 100 CHAIN SLING TYPE T & Q

CHAIN SIZE		WLL (LBS)*			OBLONG MASTER LINK SUB-ASSEMBLY DIMENSIONS (IN)			APPROX. WEIGHT (LBS)	
(IN)	(MM)	60°	45°	30°	DIA. MATERIAL A	INSIDE WIDTH B	INSIDE LENGTH C	TYPE TOS 5' REACH	TYPE QOS 5' REACH
7/32	5.5	7,000	5,700	4,000	1/2	2-1/2	5	12	16
9/32	7	11,200	9,100	6,400	3/4	2-3/4	5	20	25
3/8	10	22,900	18,700	13,200	1	3-1/2	7	37	45
1/2	13	39,000	31,800	22,500	1-1/4	4-3/8	8-3/4	67	84
5/8	16	58,700	47,900	33,900	1-1/2	5-1/4	10-1/2	106	130
3/4	20	91,700	74,900	53,000	1-3/4	6	12	154	189
1	26	154,800	126,400	89,300	2-3/4	9	16	290	368

Safety Note: A quad branch chain sling usually does not sustain loads with even distribution to its four branches, especially when loads are of rigid structure. Therefore, maximum working load limits are set at the same values as for triple branch chain slings of equal quality and size and used with branches at the same angle of inclination.

REMEMBER TO INCLUDE SLING CODE		
SLING TYPES	MASTER LINK	ATTACHMENTS
S - Single Leg	D - Oblong (standard)	S - Sling Hook
D - Double Leg	P - Pear-shaped (Available upon request)	G - Grab Hook
T - Triple Leg		F - Foundry Hook
Q - Quadruple Leg		L - Latchlok

ORDERING ALLOY CHAIN SLINGS

Type Master Link Hooks Chain Size Reach
 Type **D** Master Link **D** Hooks **S** Chain Size **3/8"** Reach **10'**

Double Leg Sling w/Oblong Link - Sling Hooks - 3/8" Chain - 10' Reach

NOTE: When ordering chain slings, pull to pull measurement **INCLUDES** oblong link.