




**SUMMER/FALL  
UTILITY & POWER  
PRODUCTS**



## LINE SWIVEL INSPECTION AND TESTING

- We test on a 600 kip calibrated horizontal test bed
- 70 kip RAM used for these line swivels
- Line swivel testing per individual manufacturer guidelines
- Tensile test to 100% of the swivels 3:1 WLL

## TEST CERTIFICATE FROM THE HSI TEST BED



HSI Rigging  
 "Built Tough Since 1930"  
[www.HanesSupply.com](http://www.HanesSupply.com)

Hanes Supply, Inc.  
 55 James E Casey Dr.  
 Buffalo, NY 14206

---

### CERTIFICATE OF TESTING

**Customer:** [Faded]

**Product:** 5/8" X 50' SPELTER SOCKET ASSEMBLY

**Description:** 5/8" X 50' 6X25 RRL EIP IWRC WIRE ROPE WITH OPEN SPELTER SOCKET ONE END. ASSEMBLED IN USA WITH DOMESTIC COMPONENTS.

**Test ID:** 75924

**Test Date:** 4/12/2024 1:19:01 PM

**Test Duration:** 00:01:11


**Serial Number:** 1127311-1

**Size:** 5/8"

**Length:** 50'

**WLL:** 8.24

**Proof Load:** 16.48

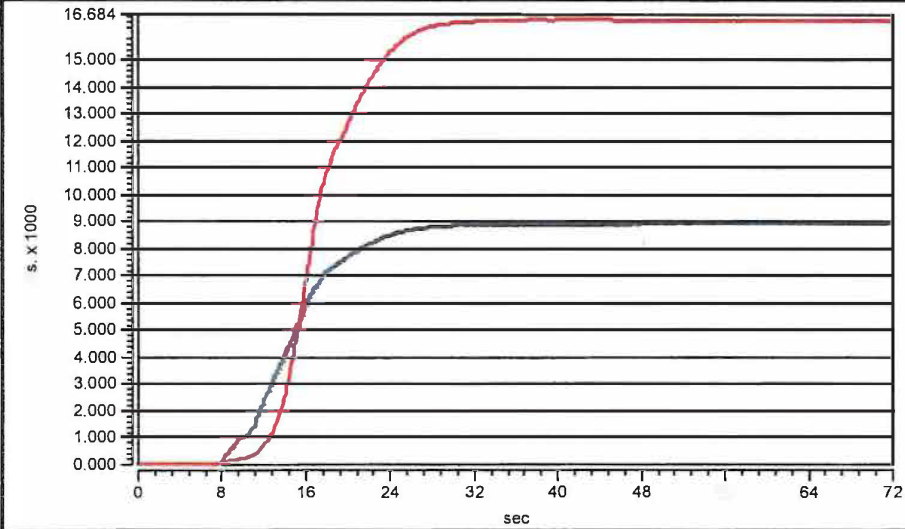

Channel	Peak
Load	16.519
Elongation	8.940



# 1 / COMPREHENSIVE RIGGING TRAINING

Our Comprehensive rigging training courses are designed to teach competent rigging skills and safe rigging practices per ASME B30, OSHA 1910 and OSHA 1926 standards. A variety of course levels are available, ranging from rigging basics to advanced load control and load calculation.

**Call ROB BRUNO at 716.983.5918 for more details!**



# 2 / RIGGING INSPECTION ON-SITE

Our onsite rigging inspection service is a comprehensive and personalized solution that helps you to ensure the safety, compliance, and readiness of your rigging equipment. Our experienced inspectors will work with you to identify your specific needs and develop an inspection plan that meets those needs. We will then thoroughly inspect your equipment and provide you with a detailed report of our findings and recommendations.



# 3 / HOIST AND TOOL REPAIR


Hanes Supply is an authorized warranty center with factory authorized/certified technicians. Quality workmanship and great customer service are our top priorities! We can service and repair electric tools, hydraulic and pneumatic tools, hoists, winches, small engines, slings and more!



# 4 / ROPE SPLICE TRAINING

HSI offers Transmission and Distribution specific rope splice training. We offer introductory courses as well as more advanced training to expand your crew's knowledge of various rope compositions including 12-strand HMPE, double braid, and kernmantle



# WE CAN REPLACE YOUR TRUCK WINCH WIRE ROPE!

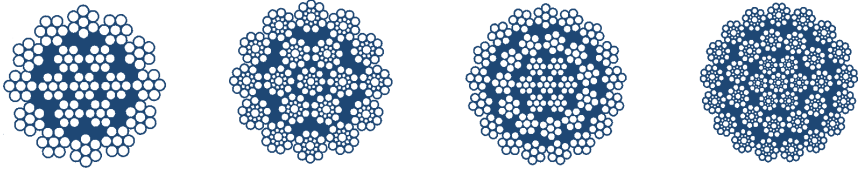

## WIRE ROPE

- 14 mm, 35x7 GR2160 galvanized
- WLL 8498 lb
- Rotation resistant
- Based on 5-to-1 design factor
- Right lang lay


Part# WIR30670



## HSI® “WIND UP” AUGER SLINGS

- 8, 9, 10, 12 ft Sections
- Incorporated Cordura® on body and eyes for durability
- Fabricated in the USA by Hanes Supply, Inc.

Part# 1Z-AUGER-SLING-EE2

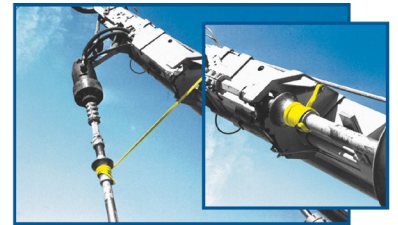

## POLE SETTING CHAIN

- 10SD0 5/8 in “XSIZE” single chain sling
- Fabricated in the USA by Hanes Supply, Inc.

Part# FIT12600



## VEHICLE RECOVERY ROPE

- 1 in, 12-Strand HMPE blue, 5:1
- 4 in - 6 in spliced eye
- All spliced eyes wrapped with Cordura®
- Vehicle recovery tag included
- Fabricated in the USA by Hanes Supply, Inc.

Part# HMPE1EE




## LINE SAGGING ROPE

- 5/8 in, 12-Strand HMPE blue, 9500 lb WLL
- 4-6 in spliced E/E
- Fabricated in the USA by Hanes Supply, Inc.

Part# HMPE5/8EE



## OUT WITH THE OLD



# HSI® POLYESTER ROUND SLINGS

- A flexible solution to your lifting needs
- Length measure from bearing point to bearing point
- Two same color polyester tubular jackets
- Available in endless round OR eye-to-eye design
- HSI® slings are assembled in an ISO 9001:2015 certified facility

## IN WITH THE NEW



CHAIN BINDER SWAP

STOCK NUMBER	COLOR	MIN. LENGTH (FT)	APPROX. MEASUREMENTS			RATED CAPACITIES (LBS)		
			WEIGHT (LBS/FT)	BODY DIA. RELAXED (IN)	WIDTH AT LOAD (IN)	VERTICAL	CHOKER	BASKET
SP280	Purple	3	.20	5/8	1-1/8	2,600	2,100	5,200
SP530	Green	3	.30	7/8	1-1/2	5,300	4,200	10,600
SP840	Yellow	3	.40	1-1/8	1-7/8	8,400	6,700	16,800
SP1080	Tan	3	.50	1-1/8	2-1/8	10,600	8,500	21,200
SP1320	Red	3	.70	1-3/8	2-1/4	13,200	10,600	26,400
SP1680	White	3	.80	1-3/8	2-1/2	16,800	13,400	33,600
SP2120	Blue	3	1.1	1-3/4	3	21,200	17,000	42,400
SP3100	Grey	3	1.6	2-1/4	3-3/4	31,000	24,800	62,000
SP4000	Orange	5	2.0	2-1/2	4-3/16	40,000	32,000	80,000
SP5300	Brown	8	2.5	2-3/4	4-5/8	53,000	42,400	106,000
SP8600	Olive	8	3.1	3-1/8	5-1/4	66,000	52,800	132,000
SP9000	Black	8	4.0	3-5/8	6	90,000	72,000	180,000
SP10000	Black	8	4.4	4	6-1/4	100,000	80,000	200,000



## BLUEMAX USA

COMPACT DYNO AND ROPE/SLING DYNO  
Micro, Milli, Centi



<b>CAPACITY</b>	1000 lb - 44,000 lb
<b>MATERIAL</b>	TITANIUM T16AL4V
<b>HOUSING</b>	ACETAL BATTERY: LITHIUM POLYMER, 0.925WH
<b>BATTERY LIFE</b>	2,000 HRS AT 0.1HZ, 20,000 HRS AT 1HZ, 200,000 HOURS AT 10HZ
<b>MEASUREMENT RANGE</b>	55 LB IN 1 LB INCREMENTS
<b>ACCURACY</b>	± 1% FULL SCALE
<b>ENVIRONMENTAL</b>	WATERPROOF TO IP67
<b>OPERATING RANGE</b>	0°F TO 158°F
<b>COMMUNICATIONS</b>	BLUETOOTH LE - BLE, BROADCASTING OR DIRECT TO GAT UP TO 320FT



## GREENLEE® RT-10 ROPE TESTER

- Test the dielectric strength of your rope in the field
  - Easily test any length of rope before use
- Clear visual and audible indication of contaminated sections
  - Magnetic mounts in the back add setup flexibility
  - Powered by field-replaceable 9V batteries

Part# RT-10-11113



## HSI® WINCH KIT

- Thern Liberty 1000 lb capstan winch with swivel mount  
Part# 3CP1S-AFS-13192
- Rock Exotica MHP58 omni-block 4.5 rigging pulley  
Part# RXMHP38
- HSI® Load Line -- 12 strand with reinforced eye  
Available in 600 ft, 900 ft or 1200 ft lengths
  - [2] 4 ft HSI® green endless round slings  
Part# SP530-04



## M18™ COMPACT 1-TON CHAIN HOIST WITH ONE-KEY™

- 1 Metric ton with 20 ft chain
- One man carry [46 lb]
- Wireless remote with 60 ft range
- Inverted and standard installs
- Variable hoist speed with fine adjustment
- Hoist battery light indicator
- Hoist inspection interval and record storage via ONE-KEY™
- Kit also includes: Two [2] M18™ REDLITHIUM™ HIGH OUTPUT™ HD 12.0 batteries, M18™ and M12™ rapid charger, wireless remote and PACKOUT™ rolling tool box

Part# 2983-22HD



## MX FUEL™ ROCKET™ DUAL POWER TOWER LIGHT KIT

- 15,000 Lumens for task and area lighting
- Over 2,300 ft of coverage at 0.5+ ft-c

Part# MXF040-1XC



## PACKOUT™ MODULAR STORAGE SYSTEM

- Easy transport ON and OFF the jobsite
- Compact size and weight delivers maximum portability
- IP56: Water and dust protection
- Dual Power: Powered by MX FUEL™ or integrated AC plug
- 2 Deployable outriggers for increased stability
- Oversized carrying handle for easier carry
- MX FUEL™ Battery is protected in a lockable and sealed compartment
- ONE-KEY™ Bluetooth card enables tracking, tool security and inventory management

Part#    A - TB018030                      D - TB018020  
              B - 48-22-8432-11961       E - TB018015  
              C - TB018025



**CHECK OUT OUR CURRENT  
 Milwaukee  
 TOOL PROMOTIONS!**



# UTILITY SOLUTIONS

POWER(FUL) INNOVATION.

## UTILITY SOLUTIONS USLR-FLEX-1 LOAD-RANGER® FLEX-LT™

- First-ever load break tool with 180° flex head that eliminates most binding positions and tool stresses
- No-pinch easy reset
- Offers widest operating range available in any load break tool
- Heavy-duty machined components



## UTILITY SOLUTIONS BLUE STRIPE® LINKSTICKS

- Various configurations with load ratings ranging from 1,500 lb to 4,000 lb
- Designed for tasks like insulating strap hoists while tensioning lines and creating work clearance in line work
- Patent-pending design automatically charges and “locks” into place when aligned with the hook

### HOOK

Load Rated  
to 4,000 lb



### HOT STICK OPERABLE HOOK

Load Rated  
to 4,000 lb



### PIGTAIL HOOK

Load Rated  
to 2,000 lb



### CROSS ARM

Load Rated  
to 1,500 lb



### SWIVEL EYE

Load Rated  
to 4,000 lb



### HEAVY DUTY PIGTAIL HOOK

Load Rated  
to 3,500 lb



# HARRINGTON LB015-5 LB SERIES COMPACT LEVER HOIST

- 1.5 ton Load, 5 ft H Lifting, 64 lb Rated, 1.3 in Hook
- 3/4 ton to 9 ton capacity
- Compact design makes it a perfect fit for use in tight quarters
- Steel body is more durable yet lighter weight than die-cast aluminum models
- Revolutionary freewheeling offers one handed operation
- 368° handle rotation and pivot and swivel top hook for easy rigging
- Single load chain through 3 ton
- Rugged, all-steel construction that actually weighs less than comparable aluminum models
- Positive braking action with weston-style load brake
- Protection against dirt and moisture with a totally enclosed brake mechanism
- Patented spring-loaded freewheel mechanism permits easy adjustment of the load chain and safeguards against accidental freewheeling under load
- Minimum between hooks: 13.2 in
- Level length: 10.4 in

Part# HOI70045



ZLH10504  
STANDARD  
3K HOIST



## SLINGCO® 3K STRAP HOIST

- ASME B-30-21 compliant
- 125% working load tested
- Hi-viz green strap
- Interlocking pawl lever system
- Replacement parts readily available
- Hot stick operable version
- Has three operating positions: lift/pull, lower/release and freewheeling

ZLH105024  
3K HOT STICK  
OPERATED  
HOIST



SLINGCO PART NUMBER	HOIST TYPE	SINGLE LINE CAPACITY lb [kg]	SINGLE LINE LIFT lb [kg]	SINGLE LINE HEADROOM lb [kg]	DOUBLE LINE CAPACITY lb [kg]	DOUBLE LINE LIFT lb [kg]	DOUBLE LINE HEADROOM lb [kg]	TOOL WEIGHT lb [kg]
ZL10504	STANDARD	1,500 [680]	10 [3]	21 [533]	3,000 [1,360]	5 [1.5]	25 [635]	11.25 [5.1]
ZLH10524	HOT STICK	1,500 [680]	10 [3]	18 [457]	3,000 [1,360]	5 [1.5]	25 [635]	11.5 [5.22]



## GREENLEE® K4250 CRIMPING TOOL

- Easy-to-use MD-6 type pop tool
- Equipped with D<sup>3</sup> die groove and **D die groove**
- Designed for crimping a wide range of overhead service entrance connections, overhead splices and overhead taps



## GREENLEE® K425BG CRIMPING TOOL


- Easy-to-use MD-6 type pop tool
- Equipped with D<sup>3</sup> die groove and **BG die groove**
- Designed for crimping a wide range of overhead service entrance connections, overhead splices and overhead taps






## MU TYPE GRIPS

- Triple weave construction
- Used for heavy duty pulling
- Suitable for bare or insulated cable, conductor or wire
- Color coded for easy identification

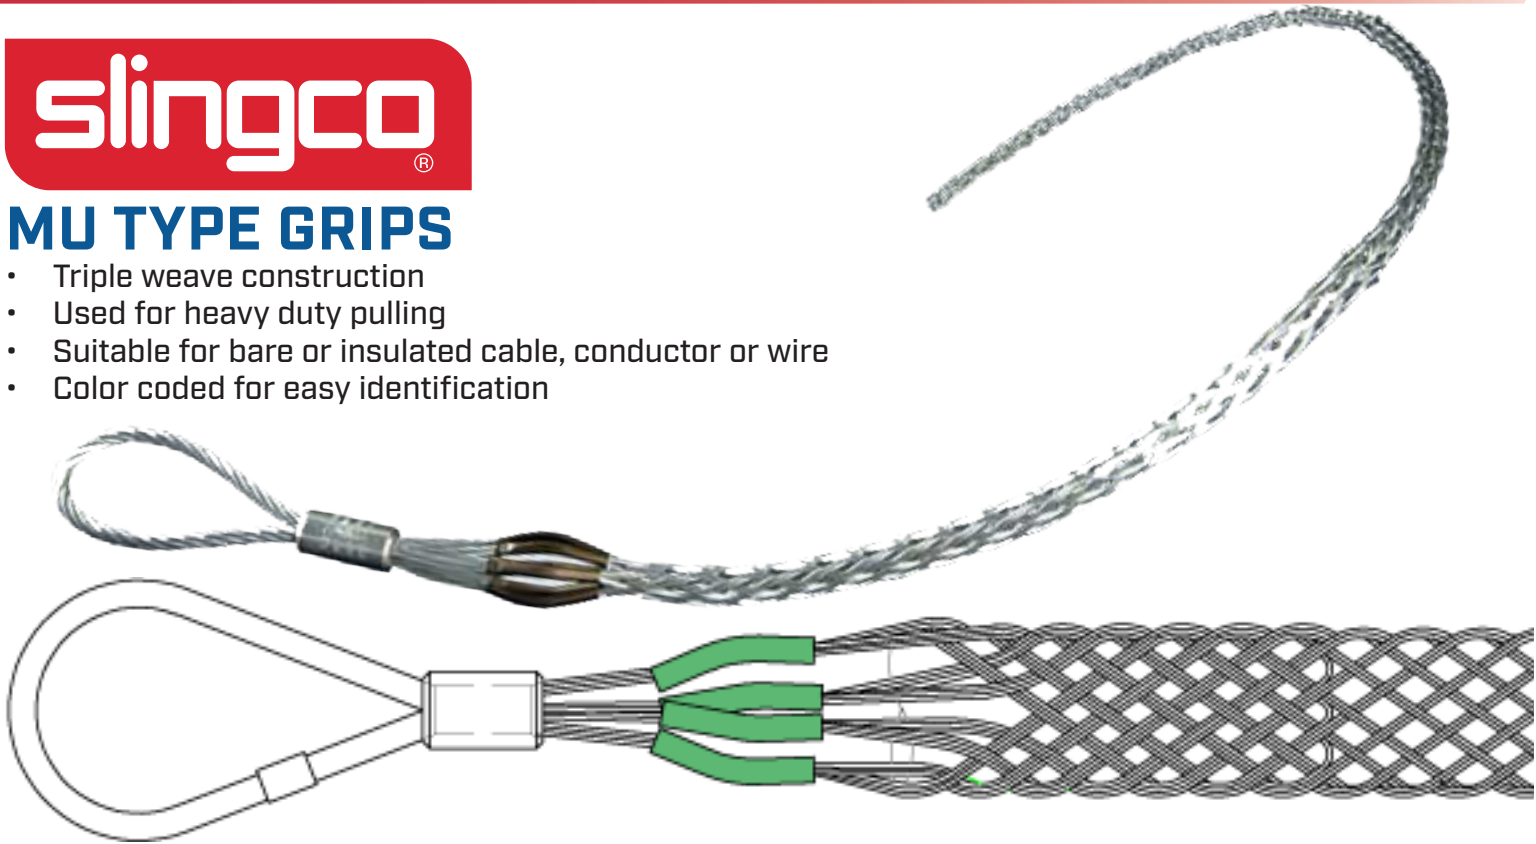

Slingco Part No.	Color Code	Range [in]	Lattice Length [in]	Approx. Break Load [lb]
ZCS1710	Dark Green	0.25 - 0.50	31	7,000
ZCS1711	Brown	0.50 - 0.75	45	10,500
ZCS1712	Light Blue	0.75 - 1.00	43	14,100
ZCS1713	Gold	1.00 - 1.25	65	25,000
ZCS1714	Black	1.25 - 1.50	59	31,000
ZCS1715	Red	1.50 - 1.75	82	31,000
ZCS1716	Dark Blue	1.75 - 2.25	82	49,000
ZCS1750	Yellow	2.00 - 2.50	72	49,000
ZCS1751	Orange	2.50 - 3.00	72	49,000
ZCS1752	Aluminum	3.00 - 3.50	74	49,000
ZCS1753	Light Green	3.50 - 4.00	76	49,000

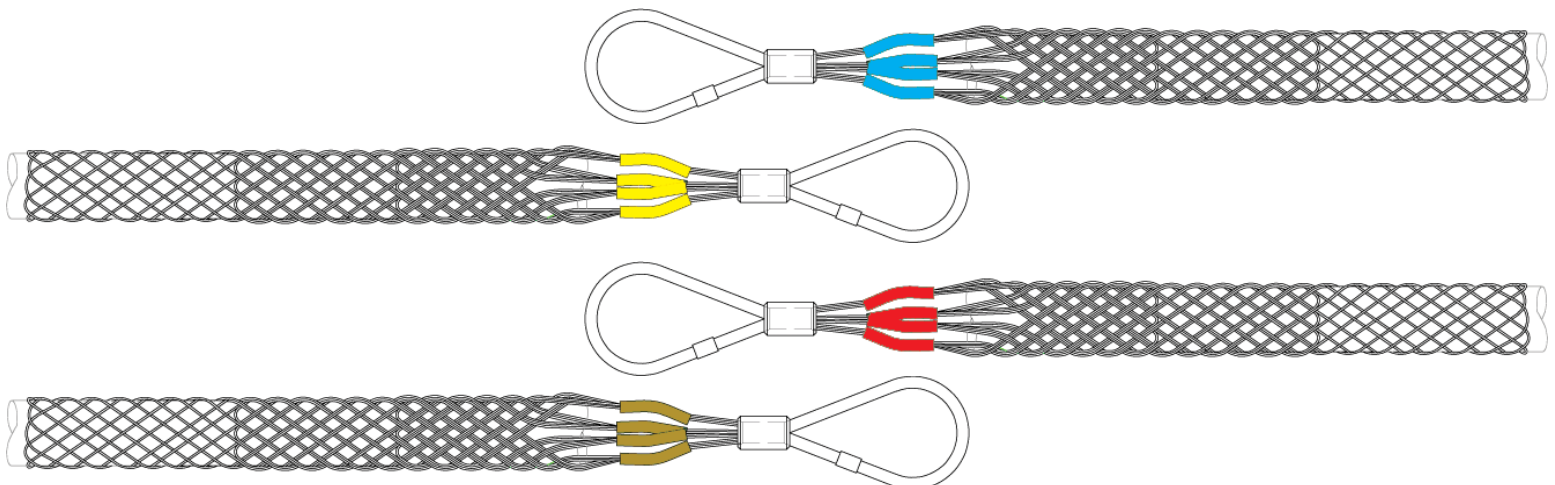

# FALLTECH® FT-LINEMAN PRO™



- 420 lb Max, per OSHA and ASTM Standards [1 User]
- Two Belt Styles -- Tongue Buckle OR Quick Connect
- 4kV Dielectric Overmolded D-Rings
- Premium Leather Seat
- Innovative Primary Connecting Links
- Climbing Harness Design


Sizing Specs					
Size	Tongue Buckle Part Number	Quick-Connect Part Number	D-Ring Size Range	Pad Size	Waist Size
Small	8050S	8050QCS	D18 to D23	33"	Up to 50"
Medium	8050M	8050QCM	D21 to D26	36"	Up to 53"
Large	8050L	8050QCL	D24 to D29	39"	Up to 56"
Extra Large	8050XL	8050QCXL	D27 to D32	42"	Up to 59"

Material Specs	
Belt	Premium Leather
Primary Connecting Links	Plated Alloy Steel (5,000 lbs. Min. Strength)
D-rings	Overmolded Alloy Steel (5,000 lbs. Min. Strength)
Adjusters	Plated Alloy Steel (3,372 lbs. Min Strength)
Buckles	Plated Alloy Steel (3,372 lbs. Min Strength)



# FALLTECH® APEX™ PRO WOOD POLE FALL RESTRICT DEVICE

- Articulating straps adjuster
- Dual locking mini snap hook
- Horizontal rope adjuster
- 15mm Technora® kernmantle rope
- Slotted bent D-ring
- CSA, ASTM, OSHA user weight Capacity of 425 lb max
- ANSI single-user weight capacity of 310 lb max

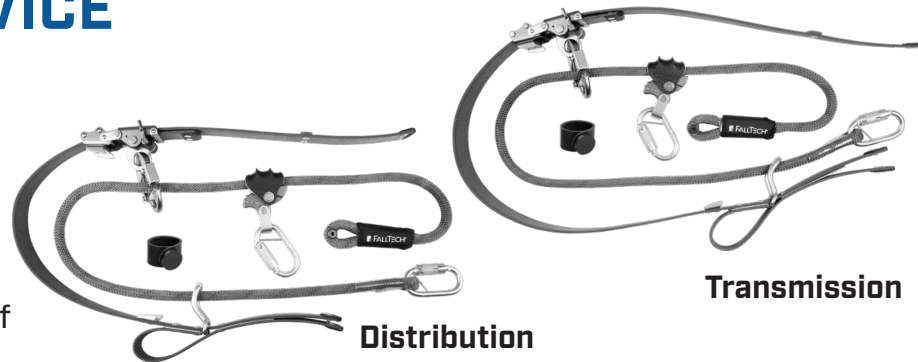

Performance Specs	
CSA Type	Type AB
ASTM Type	Type AB
Freefall Limit	2 feet (0.6 m) or less
CSA User Capacity	One User up to 425 lbs. Max
ASTM User Capacity	One User up to 425 lbs. Max
ANSI User Capacity	One User up to 310 lbs. Max
OSHA User Capacity	One User up to 425 lbs. Max

Material Specs	
Strap	Abrasion / Cut Resistant Nylon (Min. 5,000 lbs.)
Rope	15mm Technora® Kernmantle Rope (Min. 5,000 lbs.)
Adjusters	Aluminum Alloy and Plated Alloy Steel
Cleats	Plated Alloy Steel
Bent D-ring	Plated Alloy Steel
Mini Snap Hook	Aluminum Alloy and Plated Alloy Steel (5,000 lb. Min. Strength with 3,600 lb Min. Gate Strength)
Body Belt Carabiners	Plated Alloy Steel (5,000 lb. Min. Strength with 3,600 lb Min. Gate Strength)


Part #	Application	Parts Included
8180D	Distribution (4" to 18" Pole Diameter)	Strap and rope assembly
8180DS	Distribution (4" to 18" Pole Diameter)	Strap assembly only
8180T	Transmission (4" to 30" Pole Diameter)	Strap and rope assembly
8180TS	Transmission (4" to 30" Pole Diameter)	Strap assembly only
8180R	Replacement Rope	Rope assembly only
8180SR	Secondary Positioning Rope Lanyard	n/a
8180M	Replacement Magnetic Keeper	Strap and magnet

Relevant Standards	
CSA	Z259.14-12 (R2021) Type AB
ASTM	F887-20 Type AB
ANSI	Z359.3-2019

# Justrite™

## TUFFTRAK® XT

- Overall dimensions: 13 ft 5 in L x 6 ft 8 in W x 3.54 in H
- ‘Hybrid’ overlaps for extra strength at connector and corner points
- High molecular weight [HMW] polyethylene construction
- 16 fixing points
- Reversible surface

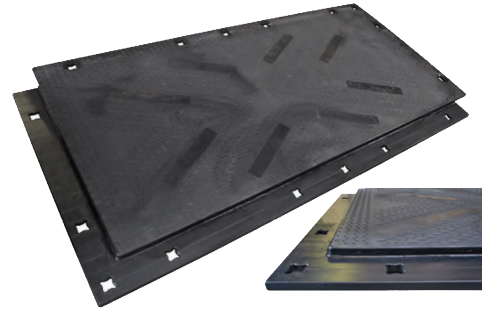


## OSHA POLE WRAPS

- Keep personnel informed of work crews working on the lines
- Indicate that no electricity should be energized



## GENERAL PURPOSE WHEEL CHOCK

- 30,000 lb Load capacity
- Handles 27 in to 35 in tires



## WARNING WHIP

- 5 ft Non-lighted, 12 in flag
  - Quick disconnect base
- Part# FS6X-QD-11531




## 5-CHANNEL LOW PROFILE GUARD DOG® GD5X75 CABLE PROTECTOR

- Protects cables and hoses up to 3/4 in diameter
- Dog Bone® connectors to extend to any desired length



## MAMBAMAT® MM48 COMPOSITE MAT FOR GROUND PROTECTION

- Designed to support weights up to 95 tons
- Ergonomic orientation with 8 standard hand holes
- 8 ft x 4 ft, 88 lb

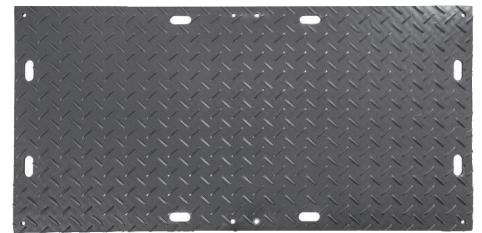

# GREENLEE®

## LOOKOUT® VOLTAGE DETECTION NETWORK

- Warns of high voltage electric fields using WAVi® technology
- Visual and audible warning indicates the location of energized fields
- Detectors communicate with each other within a mesh network
- Remotely control detectors through LOOKOUT® mobile app
- Battery life of up to: 500 hr [monitor mode], 8 hr [alert mode]



# HANES SUPPLY, INC.

*Your #1 choice for Utility and Power supplies!*

*Contact your  
HSI rep today!*



**BUFFALO/HEADQUARTERS** 55 James E. Casey Dr, Buffalo, NY 14206 **716.826.2636**

**ROCHESTER** 20 Jetview Dr, Rochester, NY 14624 **585.235.0160**

**SYRACUSE** 6181 Thompson Rd, Ste 500A, Syracuse, NY 13206 **315.299.4114**

**WATERTOWN** 22432 US Route 11, Watertown, NY 13601 **315.782.8247**

**ALBANY** 156 Railroad Ave, Albany, NY 12205 **518.438.0139**

**CONNECTICUT** 1 Shoreline Dr, Ste 6, Guilford, CT 06437 **203.481.3469**

**CAROLINAS** 4350 Thermal Ave, Midland, NC 28107 **704.220.1779**